



# PRODUCT DECLARATION

## SOUND ABSORPTION AREA FOR OBJECT


Measured and evaluated according to ISO 354 and ISO 20189

<b>Producer:</b>	Offecct
<b>Object:</b>	Soundwave® Geo BF
<b>Size [mm]:</b>	w=60 h=585 d=585

### Equivalent sound absorption area per unit (m<sup>2</sup> Sabine)

f(Hz)	1/3 Octave Band	Octave Band
50	0.01	
63	0.01	0.02
80	0.02	
100	0.03	
125	0.05	0.07
160	0.12	
200	0.13	
250	0.23	0.22
315	0.28	
400	0.32	
500	0.35	0.35
630	0.39	
800	0.39	
1000	0.40	0.40
1250	0.39	
1600	0.40	
2000	0.37	0.38
2500	0.36	
3150	0.35	
4000	0.34	0.35
5000	0.38	

Equivalent sound absorption area per unit

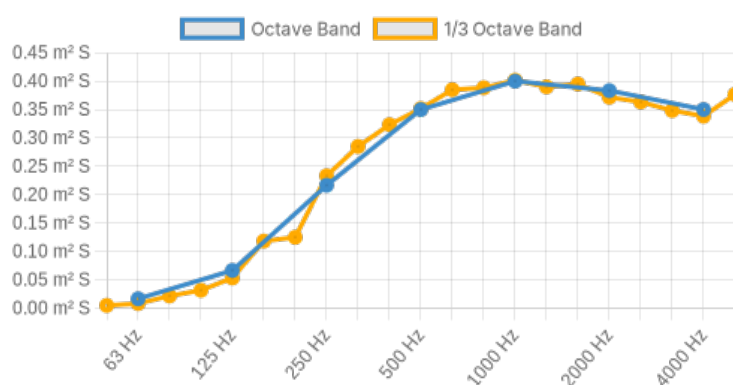

N<sub>10</sub> = 28

<b>ORIGINAL TEST REPORT</b>	<b>DATE OF REPORT</b>
-----------------------------	-----------------------

-





# PRODUCT DECLARATION


## SOUND ABSORPTION COEFFICIENT FOR SURFACE

Measured and evaluated according to ISO 354 and ISO 11654

<b>Producer:</b>	Offecct
<b>Object:</b>	Soundwave® Geo BF
<b>Size [mm]:</b>	w=60 h=585 d=585

### Sound absorption coefficient

f(Hz)	1/3 Octave Band ( $\alpha_s$ )	Octave Band ( $\alpha$ )	Practical sound absorption coefficient ( $\alpha_p$ )
50	0.02		
63	0.03	0.04	0.05
80	0.07		
100	0.09		
125	0.13	0.18	0.20
160	0.31		
200	0.43		
250	0.64	0.64	0.65
315	0.84		
400	0.96		
500	1.03	1.02	1.00
630	1.07		
800	1.03		
1000	1.05	1.03	1.00
1250	1.01		
1600	0.94		
2000	0.95	0.95	0.95
2500	0.96		
3150	0.91		
4000	0.93	0.94	0.95
5000	0.99		

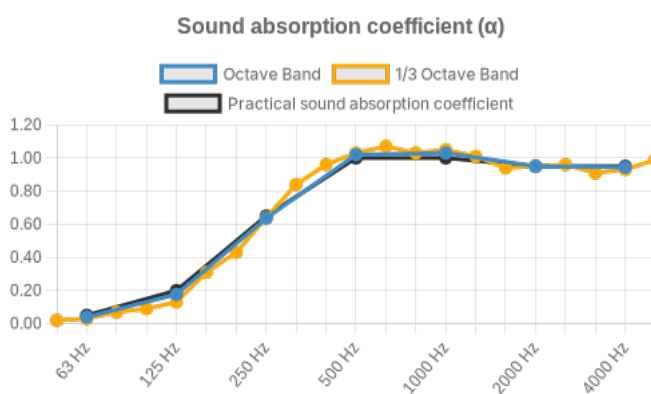

<b>ORIGINAL TEST REPORT</b>	<b>DATE OF REPORT</b>
-	-

