



PRODUKTDEKLARATION

LJUDABSORPTIONSAREA FÖR OBJEKT

Mätt och utvärderad enligt ISO 354 och ISO 20189


Producent:	Offecct
Objekt:	Soundwave® Botanic
Storlek [mm]:	w=62 h=585 d=585

Ekvivalent ljudabsorptionsarea per objekt (m² Sabine)

f(Hz)	Tersband	Oktavband
50	0.01	
63	0.03	0.02
80	0.04	
100	0.04	
125	0.05	0.07
160	0.11	
200	0.11	
250	0.18	0.17
315	0.19	
400	0.23	
500	0.27	0.27
630	0.30	
800	0.34	
1000	0.36	0.35
1250	0.35	
1600	0.35	
2000	0.34	0.33
2500	0.33	
3150	0.30	
4000	0.30	0.32
5000	0.35	

N₁₀ = 38

Ekvivalent ljudabsorptionsarea per objekt

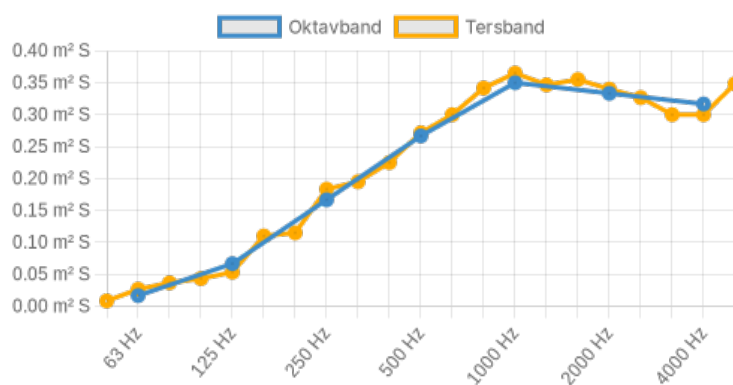

ORIGINAL TESTRAPPORT

RAPPORTDATUM

-

-





PRODUKTDEKLARATION


LJUDABSORPTIONSFAKTOR FÖR YTA

Mätt och utvärderad enligt ISO 354 och ISO 11654

Producent:	Offecct
Objekt:	Soundwave® Botanic
Storlek [mm]:	w=62 h=585 d=585

Ljudabsorptionsfaktor

f(Hz)	Tersband (α_s)	Oktavband (α)	Praktisk ljudabsorptionsfaktor (α_p)
50	0.02		
63	0.07	0.06	0.05
80	0.09		
100	0.11		
125	0.14	0.17	0.15
160	0.26		
200	0.34		
250	0.52	0.49	0.50
315	0.60		
400	0.71		
500	0.88	0.82	0.80
630	0.88		
800	0.99		
1000	1.01	0.98	1.00
1250	0.95		
1600	0.96		
2000	0.95	0.94	0.95
2500	0.91		
3150	0.88		
4000	0.87	0.91	0.90
5000	0.97		

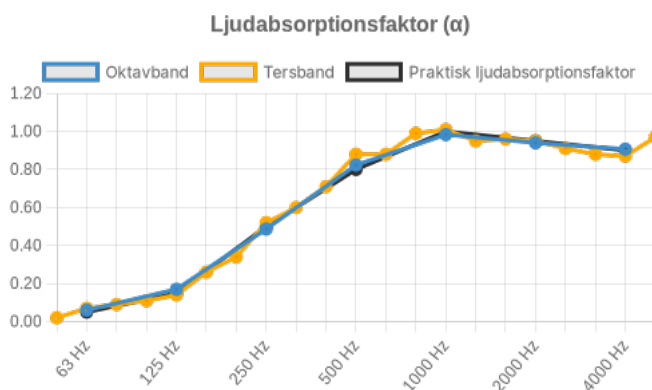

$\alpha_w = 0.8$

ORIGINAL TESTRAPPORT	RAPPORTDATUM
-	-

