



PRODUKTDEKLARATION

LJUDABSORPTIONSAREA FÖR OBJEKT


Mätt och utvärderad enligt ISO 354 och ISO 20189

Producent:	Offecct
Objekt:	Soundwave® Botanic BF
Storlek [mm]:	w=62 h=585 d=585

Ekvivalent ljudabsorptionsarea per objekt (m² Sabine)

f(Hz)	Tersband	Oktavband
50	0.01	
63	0.02	0.02
80	0.04	
100	0.05	
125	0.07	0.08
160	0.12	
200	0.15	
250	0.23	0.23
315	0.30	
400	0.32	
500	0.37	0.37
630	0.39	
800	0.41	
1000	0.40	0.38
1250	0.37	
1600	0.36	
2000	0.34	0.35
2500	0.34	
3150	0.34	
4000	0.32	0.35
5000	0.38	

Ekvivalent ljudabsorptionsarea per objekt

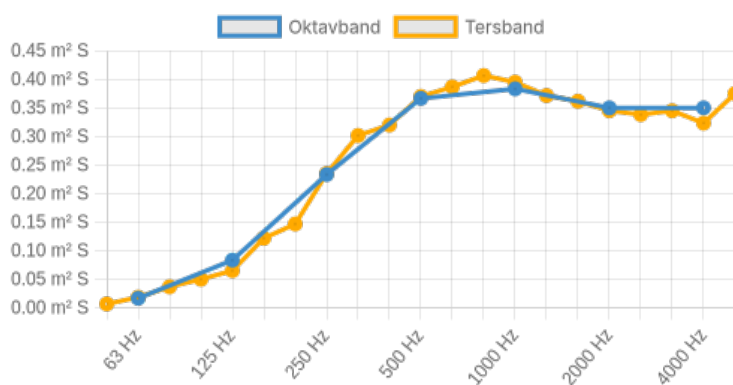

N₁₀ = 29

ORIGINAL TESTRAPPORT	RAPPORTDATUM
-	-





PRODUKTDEKLARATION

LJUDABSORPTIONSFAKTOR FÖR YTA


Mätt och utvärderad enligt ISO 354 och ISO 11654

Producent:	Offecct
Objekt:	Soundwave® Botanic BF
Storlek [mm]:	w=62 h=585 d=585

Ljudabsorptionsfaktor

f(Hz)	Tersband (α_s)	Oktavband (α)	Praktisk ljudabsorptionsfaktor (α_p)
50	0.02		
63	0.06	0.06	0.05
80	0.09		
100	0.11		
125	0.17	0.21	0.20
160	0.36		
200	0.45		
250	0.63	0.64	0.65
315	0.84		
400	0.97		
500	1.05	1.02	1.00
630	1.05		
800	1.06		
1000	1.08	1.04	1.00
1250	0.98		
1600	0.94		
2000	0.96	0.94	0.95
2500	0.93		
3150	0.92		
4000	0.92	0.95	0.95
5000	1.00		

$\alpha_w = 0.95$

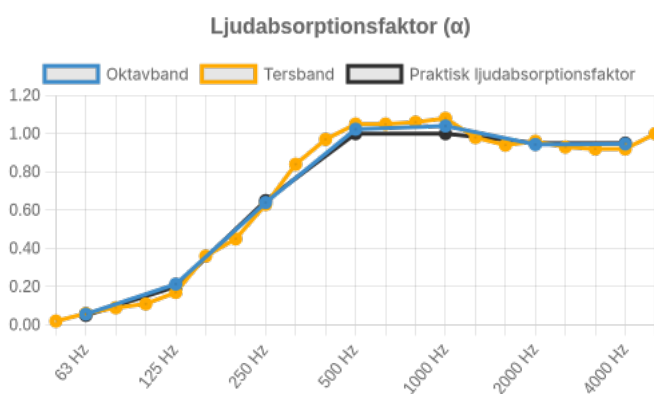

ORIGINAL TESTRAPPORT

RAPPORTDATUM

