



PRODUKTDEKLARATION

LJUDABSORPTIONSAREA FÖR OBJEKT

Mätt och utvärderad enligt ISO 354 och ISO 20189


Producent:	Offecct
Objekt:	Soundwave® Jasmine BF
Storlek [mm]:	w=73 h=508 d=585

Ekvivalent ljudabsorptionsarea per objekt (m² Sabine)

f(Hz)	Tersband	Oktavband
50	0.01	
63	0.01	0.01
80	0.01	
100	0.01	
125	0.02	0.02
160	0.04	
200	0.08	
250	0.13	0.13
315	0.17	
400	0.14	
500	0.14	0.14
630	0.13	
800	0.12	
1000	0.11	0.12
1250	0.12	
1600	0.10	
2000	0.10	0.10
2500	0.09	
3150	0.10	
4000	0.09	0.09
5000	0.09	

N₁₀ = 110

Ekvivalent ljudabsorptionsarea per objekt

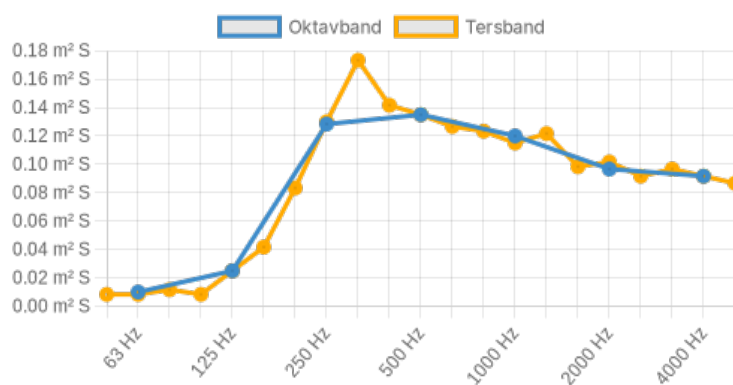

ORIGINAL TESTRAPPORT	RAPPORTDATUM
20-752-M4	2020-11-27





PRODUKTDEKLARATION


LJUDABSORPTIONSFAKTOR FÖR YTA

Mätt och utvärderad enligt ISO 354 och ISO 11654

Producent:	Offecct
Objekt:	Soundwave® Jasmine BF
Storlek [mm]:	w=73 h=508 d=585

Ljudabsorptionsfaktor

f(Hz)	Tersband (α_s)	Oktavband (α)	Praktisk ljudabsorptionsfaktor (α_p)
50	0.01		
63	0.03	0.03	0.05
80	0.06		
100	0.06		
125	0.16	0.16	0.15
160	0.26		
200	0.47		
250	0.80	0.77	0.75
315	1.04		
400	0.94		
500	0.88	0.89	0.90
630	0.85		
800	0.78		
1000	0.69	0.71	0.70
1250	0.65		
1600	0.64		
2000	0.65	0.65	0.65
2500	0.66		
3150	0.67		
4000	0.65	0.66	0.65
5000	0.67		

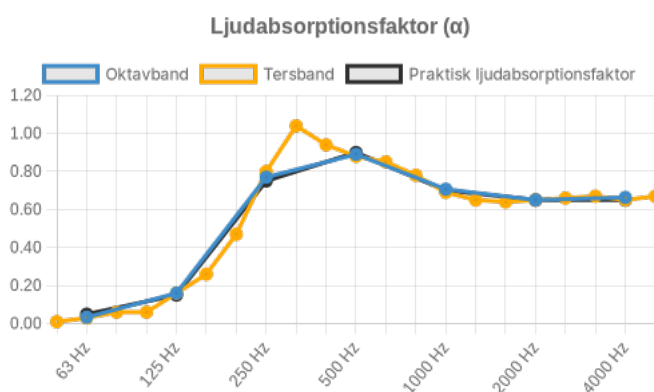

$\alpha_w = 0.7$ NRC = 0.75 SAA = 0.74

ORIGINAL TESTRAPPORT	RAPPORTDATUM
20-752-M2	2020-11-27

